

4.4.7 – 80 PIN EEPROM SIMM FAMILY

CAPACITY—128K, 256K, 512K, 1M, 2M, 4M, & 8M WORDS OF 32 BITS

CONFIGURATION—Fifteen Different Configurations Using 1mb, 4mb, & 16mb Devices.

LOGIC FEATURES—The modules contain a “PRESENCE DETECT” feature which consists of output pins which supply an encoded value which defines the storage capacity, configuration, and speed of the module.

PACKAGE—80 PIN JEDEC MEMORY MODULE

PIN ASSIGNMENTS AND PD TABLES—Fig. 4.4.7-A

CONFIGURATION BLOCK DIAGRAM—Figs. 4.4.7-B

PIN #	PIN NAME	PIN #	PIN NAME
1	VSS	41	A11
2	VDD	42	A10
3	VPP/NC	43	A9
4	\overline{G}	44	A8
5	$\overline{W0}$	45	A7
6	$\overline{W1}$	46	A6
7	RFU	47	A5
8	DQ16	48	A4
9	DQ17	49	A3
10	DQ18	50	A2
11	DQ19	51	A1
12	DQ20	52	A0
13	DQ21	53	$\overline{W3}$
14	DQ22	54	VSS
15	DQ23	55	DQ15
16	DQ24	56	DQ14
17	DQ25	57	DQ13
18	DQ26	58	DQ12
19	DQ27	59	DQ11
20	DQ28	60	DQ10
21	$\overline{E3}$	61	DQ9
22	$\overline{E2}$	62	DQ8
23	$\overline{E1}$	63	DQ7
24	$\overline{E0}$	64	DQ6
25	VSS	65	DQ5
26	DQ29	66	DQ4
27	DQ30	67	DQ3
28	DQ31	68	DQ2
29	$\overline{W2}$	69	DQ1
30	A22	70	DQ0
31	A21	71	VPP/NC
32	A20	72	VDD
33	A19	73	PD1
34	A18	74	PD2
35	A17	75	PD3
36	A16	76	PD4
37	A15	77	PD5
38	A14	78	PD6
39	A13	79	PD7
40	A12	80	VSS

PRESENCE DETECT TRUTH TABLE							
Module Organization	Device Density	# of Dev.	Module Capacity	PD1	PD2	PD3	PD4
No Module				1	1	1	1
.128K X 32	1M	4	512KB	0	1	1	1
256K X 32	1M	8	1MB	1	0	1	1
512K X 32	1M	16	2MB	0	0	1	1
256K X 32	2M	4	1MB	1	1	0	1
512K X 32	2M	8	2MB	0	1	0	1
1M X 32	2M	16	4MB	1	0	0	1
512K X 32	4M	4	2MB	0	0	0	1
1M X 32	4M	8	4MB	1	1	1	0
2M X 32	4M	16	8MB	0	1	1	0
1M X 32	8M	4	4MB	1	0	1	0
2M X 32	8M	8	8MB	0	0	1	0
4M X 32	8M	16	16MB	1	1	0	0
2M X 32	16M	4	8MB	0	1	0	0
4M X 32	16M	8	16MB	1	0	0	0
8M X 32	16M	16	32MB	0	0	0	0

1 = OPEN CIRCUIT (NO CONNECTION)
0 = CONNECTED TO VSS

MODULE SPEED IDENTIFICATION			
MAX ACCESS TIME	PRESENCE DETECT PIN		
	PD5	PD6	PD7
NOT DEFINED	1	1	1
45 nS	0	1	1
55 nS	1	0	1
70 nS	0	0	1
90 nS	1	1	0
120 nS	0	1	0
150 nS	1	0	0
200 nS	0	0	0

NOTE – This family of pinouts is approved for use in SIMM package that is nominally 4.65" long and a height of 0.85" See JEDEC Publication 95, section MO-XXX.

FIGURE 4.4.7-A
128K TO 8M BY 32 EEPROM SIMM, PINOUT AND PD TABLES
Release 4-7

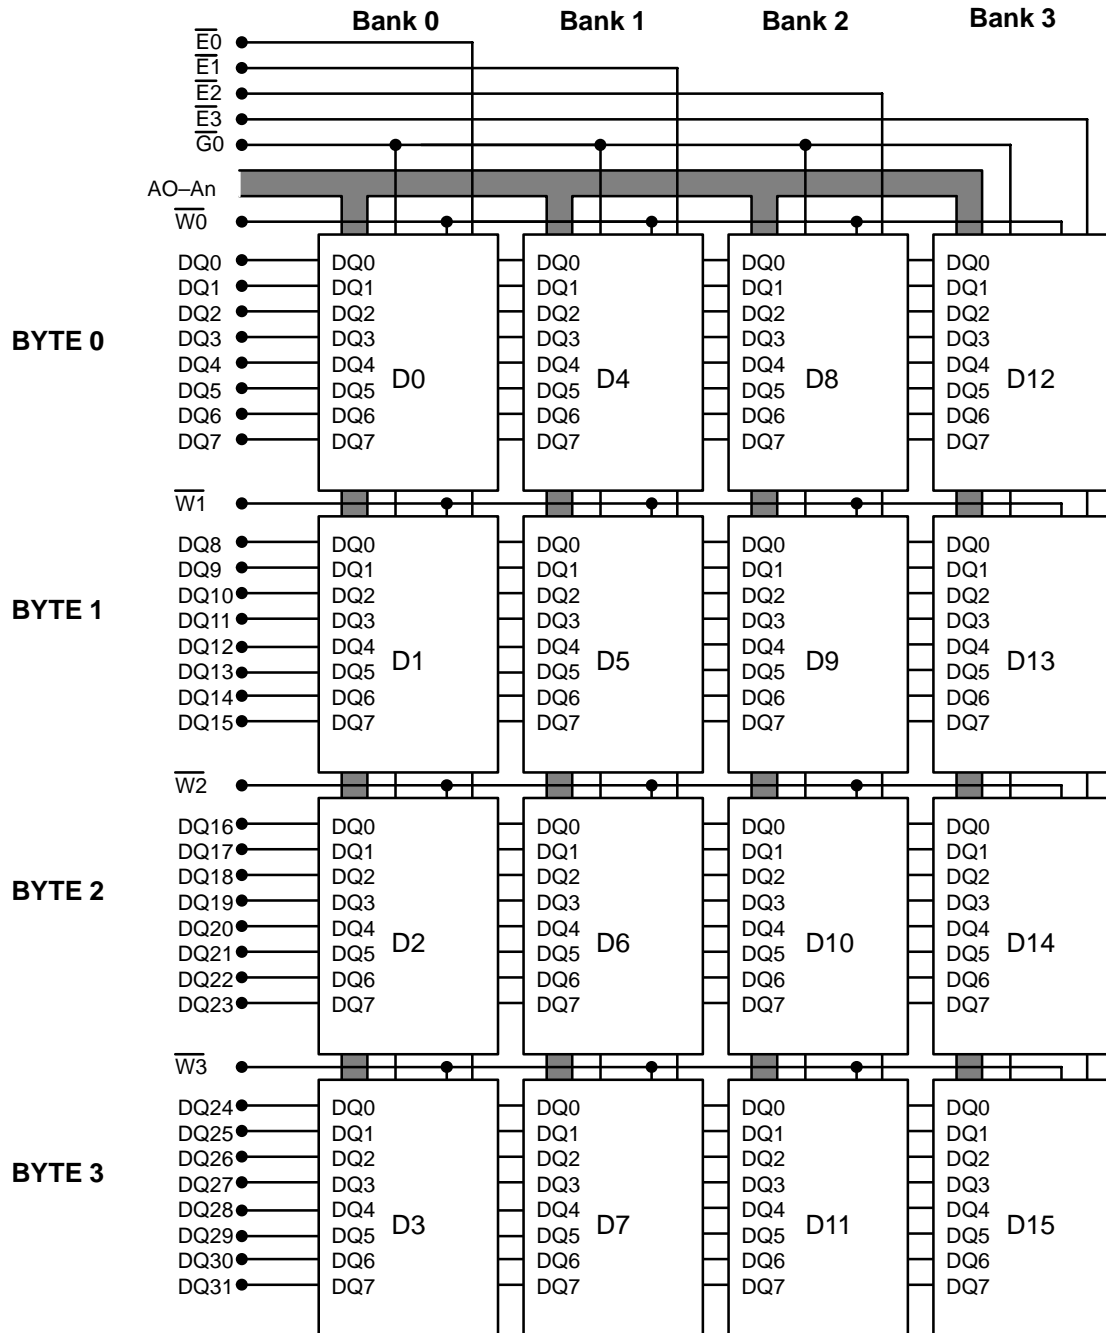


FIGURE 4.4.7-B
128K TO 8M BY 32 EEPROM SIMM BLOCK DIAGRAM